# PT8232

# Heavy Industrial • RS232

Absolute Linear Position to 60 inches (1524 mm) **Aluminum or Stainless Steel Enclosure Options VLS Option To Prevent Free-Release Damage IP67 • NEMA6 Protection** 

#### **GENERAL**

Full Stroke Ranges		0-2 to 0-60 inches
Electrical Interface		RS232
Format		HEX
Accuracy	± 0.	25% to ± 0.10% full stroke
Repeatability		± 0.02% full stroke
Resolution		± 0.003% full stroke
Measuring Cable	stainl	ess steel or thermoplastic
Enclosure Material	powder-painted al	luminum or stainless steel
Sensor	plastic-hybrid	d precision potentiometer
Potentiometer Cycle Life		see ordering information
Maximum Retraction Accel	eration	see ordering information
Weight, Aluminum (Stainle	ss Steel) Enclosure	3 lbs. (6 lbs.), max.


## **ELECTRICAL**

Input Voltage	922 VDC
Input Current	40 mA
Baud Rate	9600 (selectable to 38.4K)
Update Rate	32 msec

#### **ENVIRONMENTAL**

Environmental Suitability	NEMA 4X/6, IP 67
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g's to 2000 Hz maximum



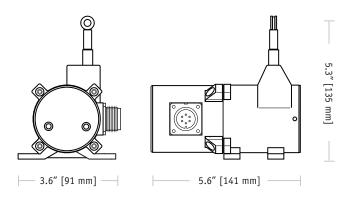

The PT8232 delivers position feedback via RS232 serial communication to your data acquisition or controller system. The PT8232 sends a raw 16-bit count from 0000H to FFFFH. Additionally this device can be set to continuously send data or send data only when polled.

As the internal position sensing element is a precision potentiometer, this transducer maintains current accurate position even during power loss and does not need to be reset to a "home" position.

## Output Signal:






20630 Plummer Street • Chatsworth, CA 91311




## I/O Format:

#### **Data Format**



#### **Data Frame**

#### 6 byte Hex string:



\* -see below

Important! All communications to/from the transducer are in HEX!

#### **User Commands:**

		User Cor	nmand			Sensor F	esponse	
Description	<cmd></cmd>	<b<sub>0&gt;</b<sub>	<b<sub>1&gt;</b<sub>	<b<sub>2&gt;</b<sub>	<cmd></cmd>	<b<sub>0&gt;</b<sub>	<b<sub>1&gt;</b<sub>	<b<sub>2&gt;</b<sub>
Get Sensor Info	0x05	0x00	0x00	0x00	0x05	version <sup>(4)</sup>	date <sup>(5)</sup>	date <sup>(5)</sup>
Get Serial Number	0x15	0x00	0x00	0x00	0x15	se	rial number <sup>(</sup>	3)
Start Continuous Data	0x25	0x00	0x00	0x00	0x25	0x00	0x00	0x00
Stop Continuous Data	0x35	0x00	0x00	0x00	0x35	0x00	0x00	0x00
Get Position Data	0x45	0x00	0x00	0x00	0x45	$CMC^{(1)}$	$CMC^{(1)}$	status <sup>(2)</sup>

## (1)CMC - Current Measurement Count (Position)

The Current Measurement Count (CMC) is the output data that indicates the present position of the measuring cable.

The CMC is a 16-bit value that occupies the first two bytes ( $B_0$  and  $B_1$ ) of the data field.  $B_0$  is the MSB (most significant byte) and  $B_1$  is the LSB (least significant byte).

The CMC starts at 0000H with the measuring cable fully retracted and continues upward to the end of the stroke range stopping at FFFFH. This holds true for all ranges.

## (2)Status

Hear Command

The status byte is used as a flag to indicate the validity of the position signal that the internal electronics receives from the potentiometer.

Flags are as follows: 0x00 = GREEN, 0x55 = YELLOW, 0xAA = RED

A "green" flag shows everything OK. A "yellow" or "red" flag indicates that the sensor has either been extended beyond its range or that there is a problem with the potentiometer.

## (3)Serial Number

Each sensor has it's own unique serial number. This information can be retrieved by sending the sensor the "Get Serial Number" command.

The serial number is a 3 byte value from which ranges from 0 to 9999999 (decimal).

Canaar Daananaa

#### (4) Version

This is a single byte value (0-255 decimal) which indicates the currently installed firmware version of the sensor.

## (5) Date

This is a 2 byte value showing the date of currently installed firmware. This value ranges from 01011 - 12319 (decimal). Format is MMDDY. While the month and day are expressed as two digit numbers the year is expressed in a single digit only.


Example: 08054 = August 5, 2004

## **Baud Rate**

The baud rate can be set using switches **7** & **8** on the 8-pole DIP switch found on the rs232 controller board located inside the transducer.


DIP-7	DIP-8	baud rate
0	0	9600
1	0	19200
0	1	38400
1	1	9600



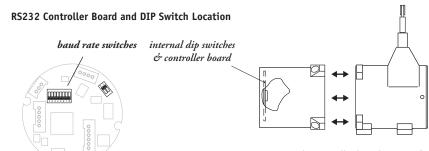

to gain access to the controller board, remove four Allen-Head Screws and remove rear cover.



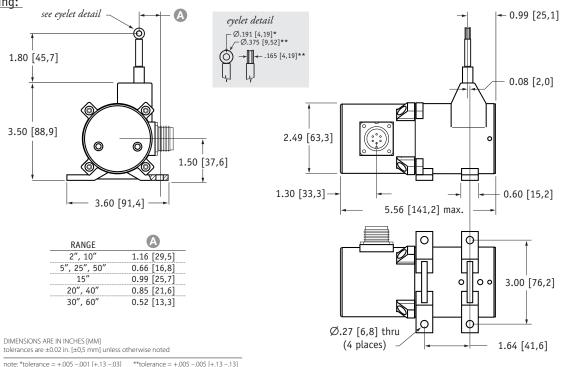

## Ordering Information:

## **Model Number:**



Sample Model Number:

PT8232 - 50 - AL - N34 - T1 - CG - M6

R range: enclosure aluminum

.034 nylon-coated stainless measuring cable:

measuring cable tension: standard ① cable guide: standard

electrical connection: 6-pin plastic connector

# Full Stroke Ranae:

R order code:	2		5		10		15		20		25		30		40		50		60
full stroke range, min:	2 in.	:	5 in.	:	10 in.	:	15 in.	:	20 in.	:	25 in.	:	30 in.	:	40 in.	:	50	:	60
accuracy (% of f.s.):	0.25%	-	0.25%	-	0.15%		0.15%		0.15%	:	0.15%	:	0.15%	-	0.10%		0.10%	:	0.10%
potentiometer cycle life*:	2.5 x 10 <sup>6</sup>	:	$2.5 \times 10^{6}$		5 x 10 <sup>5</sup>	:	$2.5 \times 10^5$		2.5 x 10 <sup>5</sup>	:	2.5 x 10 <sup>5</sup>								

<sup>\*–1</sup> cycle is defined as the travel of the measuring cable from full retraction to full extension and back to full retraction

## **Enclosure Material:**

316 A order code: powder-painted aluminum 303 stainless steel 316 stainless steel

# **Measuring Cable:**

N34 **S47** V62 B order code: Ø.062-inch thermoplastic Ø.034-inch nylon-coated stainless steel Ø.047-inch stainless steel

available in all ranges

5, 15, 20, 25, 30-inch ranges only

all ranges up to 30 inches only

## Ordering Information (cont.):

## Measurina Cable Tension:

	• order code:	T1		T2		Т3
		standard tension	:	medium tension	:	high tension
	2, 10-inch:	39 oz.		65 oz.		116 oz.
full stroke ra	ange 15-inch:	26 oz.		43 oz.		77 oz.
cable ten	sion < 20, 40-inch:	20 oz.		33 oz.		60 oz.
specificat	<i>ions</i> 5, 25, 50-inch:	16 oz.		26 oz.		47 oz.
	30, 60-inch:	13 oz.		22 oz.		40 oz.
						tension tolerance: ± 50%
		maximum acceleration		maximum acceleration		maximum acceleration
	aluminum enclosure:	15 g	:	25 g		40 g
	stainless steel enclosure:	6 g		12 g		18 g

Cable Guide Options:

Order code:

CG

SS

CB\*

BR

Standard cable guide


stainless steel cable guide

polyurethane cable guide

integral cable brush

i.i.

# **Electrical Connection:**

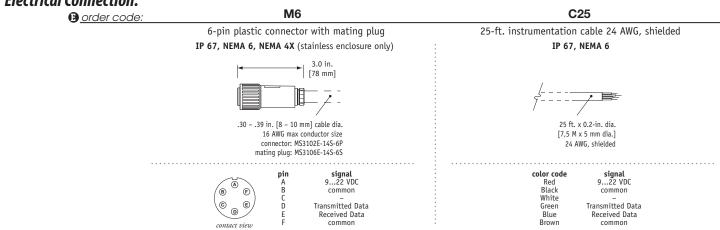

version: 6.0 last updated: November 5, 2012

\*note: all ranges up to 25 inches only